


TLS-25m

Mini Size Optical Light Source



Product Characteristics

- 2.5mm universal
- Wavelength: 1310/1550nm
- Low battery reminder function
- Pocket size design
- Typical output power: $\geq -5\text{dBm}$
- Drop protection: 2m
- Water-resistant keys
- LED lighting, clear in the dark environment



Backlight display



One-key start



Automatic shutdown



Plug and play



Super long standby



Silicone protective case




Main Features



Drop protection



Mini Size

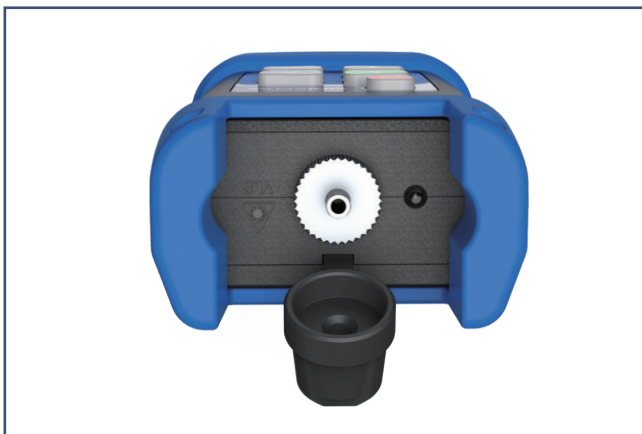

LED lighting



Detachable protective sleeve


TLS-25m



SC (Optional)



FC (Optional)




ST (Optional)



LC (Optional)

Wavelength(nm)	1310/1550nm
Typical Output Power	≥-5dBm
Optical Connector	2.5mm universal (LC/SC/FC/ST purchased separately)
Power Supply	Alkaline Battery(2 AAA 1.5V batteries)
Output Stability	±0.05dB/15mins; ±0.1dB/ 8hours
Modulation Frequencies	CW, 270Hz, 1KHz, 2KHz
Dimensions / Weight	130x65x35mm / 180g

Product Display

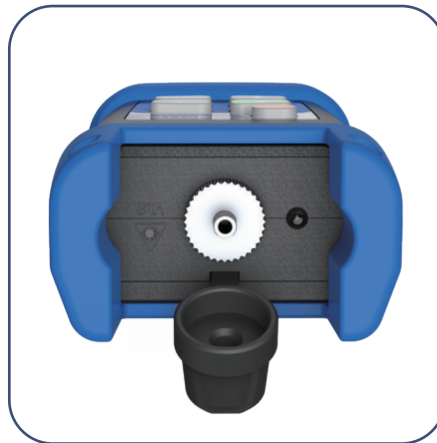

CONTACT US:

NANJING ORIENTEK OPTICAL COMMUNICATION LTD.

HEAD OFFICE:

Jianshan Industry Park, Liuhe District, Nanjing, Jiangsu, China

Web: www.orientekot.com

Mail: info@orientekot.com

Export Control Regulations

The products and/or technical information presented in this publication may be subject to the application of the Foreign Exchange and Foreign Trade Act and other related laws and regulations in China. In addition, the Export Administration Regulations (EAR) of the United States may be applicable. In cases where exporting or reexporting the products and/or technical information presented in this publication, customers are requested to follow the necessary procedures at their own responsibility and cost. Please contact the Ministry of Economy, Trade and Industry of China or the Department of Commerce of the United States for details about procedures.