

# T22M

Optical Power Meter




## Product Features

---


- High sensitivity and large dynamic range.
- Universal connector: FC/SC/ST/LC.
- dBm and  $\mu$ W measurement.
- Automatically power off.
- Pocket size design.
- Fast response without preheating.
- Low power display.

## Product Features

---



Plug and  
play



Press to  
start



6 wavelengths




Auto-off



Dust cap

# Product Features

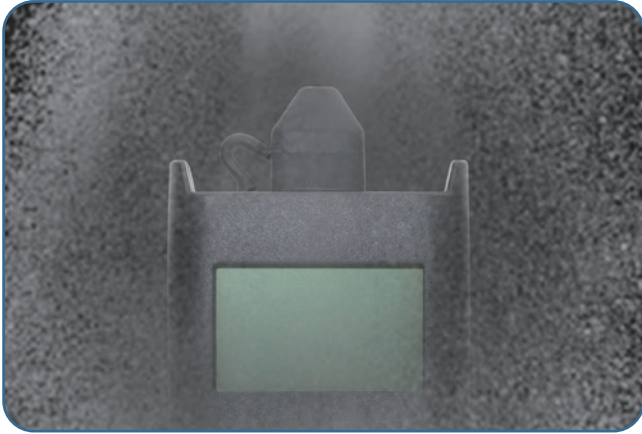

## Support 4 types of optical fiber connectors



SC



ST



FC



LC(optional)

## Specification

|                            |  |
|----------------------------|--|
| Model                      | T22M                                   |
| Wavelength(nm)             | 850/1300/1310/1490/1550/1625           |
| Applicable fiber           | SM,MM                                  |
| Detector type              | InGaAs                                 |
| Measuring range(dBm)       | -70~+10                                |
| Uncertainty                | 5%                                     |
| Output Power(dBm)          | ---                                    |
| Connector type             | 2.5mm Universal Connector for FC、SC、ST |
| Working temperature(°C)    | -10 to +60                             |
| Storage temperature(°C)    | -70~+3                                 |
| Battery                    | Alkaline Battery (2AAA 1.5V batteries) |
| Contionous working time(h) | 240                                    |
| Dimensions(mm)             | 131(L)x64(W)x34(H)                     |
| Weight(g)                  | 160                                    |

# Product display



## CONTACT US:

Orientek Optical Technology Ltd.

## HEAD OFFICE:

Jianshan Industry Park, Liuhe District, Nanjing, Jiangsu, China

TEL: (+86) 25 8687 0598

FAX: (+86) 25 8687 0598

[www.orientekot.com](http://www.orientekot.com)

[sales@orientekot.com](mailto:sales@orientekot.com)

### Export Control Regulations

The products and/or technical information presented in this publication may be subject to the Foreign Exchange and Foreign Trade Act and other related laws and regulations in China. In addition, the Export Administration Regulations (EAR) of the United States may be applicable. In cases where exporting or reexporting the products and/or technical information presented in this publication, customers are requested to follow the necessary procedures at their own responsibility. Please contact the Ministry of Economy, Trade and Industry of China or the Department of Commerce of the United States for details about procedures.