

TPN-35

PON Optical Power Meter



Key Features

- For PON Network Testing
- Providing simultaneous measurement for all three wavelengths on the fiber (1490nm, 1550nm,1310nm).
- Used in Burst mode measurement of 1310nm upstream.
- Test 3 wavelengths separately and simultaneously
- One-year warranty and Three-year recommended calibration interval



Backlight display



Plug and play



One key start



3 calibrated wavelengths



Automatic shutdown



Silica gel protect pads



Data storage



USB link

PRODUCT FEATURES



TPN-35

Drop-proof





Bracket



Rubber Protect

Specifications

Optical Specifications	4.0	24.0	1.4	00	1 - 4 -	·F0
	1310		1490		1550	
Measurement Range (DBm)	CW	+15 ~ -35	+10 ~ -50		+25 ~ -45	
	BW	+8 ~ -30				
	<0.4					
Spectral Passband (nm)	1260–1360		1480–1500		1540–1560	
Wave Isolation (dB)	1490	>50	1310	>40	1310	>40
	1550	>50	1550	>40	1490	>40
ORL (dB)	-55					
Fiber Type	Single-mode fiber					
Connector Type	SC/PC					
General Specifications						
Precision	±0.21 dB @ (22±2.5) °C, @ 1300 nm/ 1490 nm / 1550 nm					
Power Uncertainty	0.5 dB					
Unit	dBm; dB; W					
Resolution	0.1 dB					
Power	3x AA batteries					
Display	LED					
Threshold Sets	12 configurable threshold sets with toolbox software					
Data Storage	Store up to 1800 test results and built-in USB interface for file transfer and download					


Standardar package

Description

TPN-35

TPN-35 main body, USB LINE, warranty card, Uaser guide, SC Connectors, Cleaning swabs, Carry bag

FTTH Networks

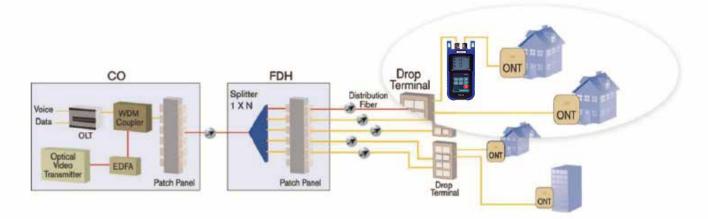

PACKAGING DISPLAY:







CONTACT US:

NANJING ORIENTEK OPTICAL COMMUNICATION LTD.

HEAD OFFICE:

Jianshan Industry Park, Liuhe District, Nanjing, Jiangsu, China

Web: www.orientekot.com
Mail: info@orientekot.com

Export Control Regulations

The products and/or technical information presented in this publication may be subject to the application of the Foreign Exchange and Foreign Trade Act and other related laws and regulations in China. In addition, the Export Administration Regulations (EAR) of the United States may be applicable. In cases where exporting or reexporting the products and/or technical information presented in this publication, customers are requested to follow the necessary procedures at their own responsibility and cost. Please contact the Ministry of Economy, Trade and Industry of China or the Department of Commerce of the United States for details about procedures.